

STERLING

A KOHLER COMPANY

1
Before you begin


INSTALLATION INSTRUCTIONS

NON-METALLIC WASHERLESS TWIN HANDLE KITCHEN FAUCET With or Without Spray

Use this diagram to familiarize yourself with the various parts of the faucet assembly. Make sure you have all the illustrated parts before you begin installation.

If you are putting in a new sink, it is easier to mount the faucet, drain and any other accessories **before** installing the sink into the countertop.

- Observe all local plumbing codes.
- Carefully inspect the valve parts for any damage.
- Flush all piping thoroughly before installing.
- Shut off hot & cold water supplies.
- Do not use plumber's putty or thread sealants on mounting nuts or coupling nuts.

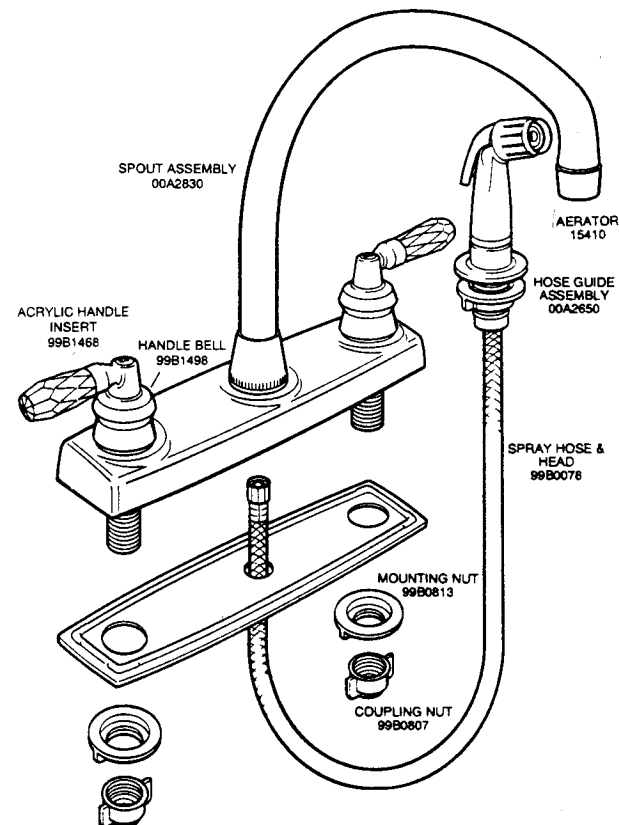

E042600

2/99


STERLING

P.O. Box 427, Oklahoma Street
Sheridan, Arkansas 72150-0427

E042600

TWIN HANDLE KITCHEN FAUCET

2 Items you need



NOTE: OTHER TOOLS MAY BE NEEDED TO REMOVE OLD FAUCET


1 Adjustable wrench, Phillips and flathead screwdrivers, and Teflon tape, or pipe sealant.

OPTIONAL MATERIALS:

- Supply stops (2) Some installations may require stops to be installed.
- Supply tubing (2) and fittings will need to be provided.


2 You may need the above materials.

HELPFUL OPTION:




3 Basin wrench for removing old faucet.


3 Remove old faucet



1 Turn off both water supplies.




2 Disconnect supply lines.




3 Remove mounting nuts, lift off faucet.


4 Install faucet



1 If your faucet has a spray, place hole guide down through hole at extreme right of sink top. Add mounting nut to underside and FINGER tighten firmly.




2 Insert spray hose down through hose guide and up through center hole in sink and putty plate.




3 Position putty plate. Apply Teflon tape to spray outlet on body. Attach spray hose to spray outlet by rotating faucet body. Tighten securely with wrench.


5 Flush lines




1 Turn on water supplies and check for leaks. With faucet off remove aerator. Turn on hot and cold to flush lines and faucet. Operate spray. Turn off faucet and replace aerator.



4 Position faucet assembly on sink with shanks extending through their appropriate holes.



5 Fasten faucet to sink with mounting nuts supplied. FINGER tighten firmly.



6 Connect hot & cold supply lines onto faucet shanks with coupling nuts. FINGER tighten securely.
NOTE: Do not use supply tubes w/metal formed ends with non-metallic shanks.

Sterling Limited Five Year Warranty

Sterling Plumbing Group, Inc. ("Sterling") warrants this faucet to be free of manufacturing defects and to be drip free for five years. Damage due to improper installation, maintenance or handling are not considered manufacturing defects and are not covered by this warranty. Labor, shipping and installation costs or other charges incidental to warranty service are to be borne by the original purchaser. This warranty is valid for the original purchaser only.

Sterling will, at its election, repair or replace a faucet where Sterling's inspection discloses any such defects occurring in normal residential usage.

To obtain warranty service return the defective part(s) to your cooperating retail seller or send them to our Customer Service Department, P.O. Box 427, Sheridan, AR 72150. Refer any questions to our Customer Service Department at 1-800-245-2207.

IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO ONE YEAR FROM DATE OF PURCHASE. STERLING DISCLAIMS ANY RESPONSIBILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES. Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental or consequential damages, so these limitations or exclusions may not apply to you. This warranty gives you special legal rights. You may also have other rights which vary from state to state.

This is our exclusive written warranty.

For more information on Sterling Faucets, please call 1-800-STERLING.

STERLING

P.O. Box 427, Sheridan, AR 72150