



# Deluxe Framed Sliding Shower Door 5975-59

## Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Continuous guide mechanism for smooth, quiet sliding action and easy cleaning.
- Reversible top track and towel bar offer multiple aesthetic options.

## Material

- Anodized aluminum prevents rusting or corrosion.
- Tempered glass ensures maximum safety and durability.

## Installation

- Out-of-plumb adjustability allows for simpler installation.
- Can be installed to open to the left or right.

## Components

Additional included component/s: Hardware kit.



## Codes/Standards

ANSI Z97.1 (Tempered Glass)  
CPSC 16CFR 1201

## STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	N	Nickel

## Available Glass Options


Code	Description
	Birchwood®
	Ellipse
	Rain
	Templar™

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

7-13-2017 12:02

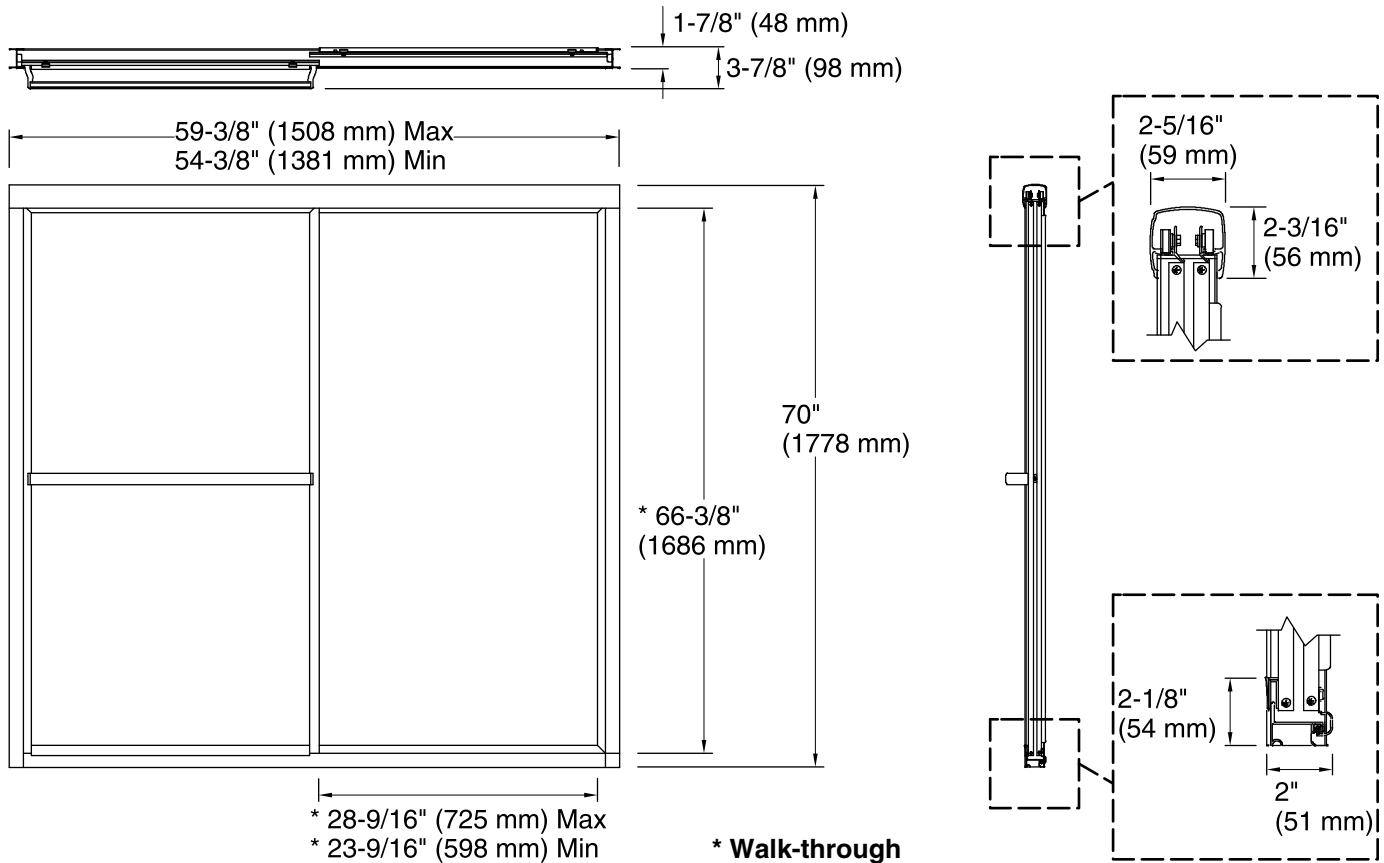

**Technical Information**

All product dimensions are nominal.  
 Installation type: For shower base installation  
 Opening Width - Min: 54-3/8" (1381 mm)  
 Opening Width - Max: 59-3/8" (1508 mm)  
 Walk-through - Min: 23-9/16" (599 mm)  
 Walk-through - Max: 28-9/16" (726 mm)  
 Glass thickness: 1/8" (3 mm)

**Notes**

Install this product according to the installation guide.  
 The vertical opening should be a minimum of 71-1/2" (1816 mm) to allow for installation clearance.